

PANTHER



nexxis

NEXXIS.COM

PIPELINE INSPECTION ROBOTIC SYSTEM

With a variety of configurations, the Panther Pipe Crawler can inspect almost any confined space or pipeline application.

Offering full modularity, the Panther Pipe Crawler can be equipped with a magnetic attachment for travel on ferrous surfaces. It's compact design stands out as a primary feature, offering versatility through options such as multiple cameras, extended tethers, cutting-edge reporting software, and image enhancement systems, opening up a wealth of potential applications.

Easily Customised with a Range of Equipment

Capable of operating over long distances and a wide range of

diameters, the Panther Pipe Crawler system is a state-of-the-art pipe inspection system with advanced capabilities. The system comes standard with a 100m tether cable, with options for longer lengths available. Operators can examine pipes from 8" in diameter. The Panther comes with a full HD PTZ camera as with 4 LEDs.


Customisable with an array of optional equipment including retrieval tools, laser measurement & profiling systems and other Non-Destructive Testing (NDT) sensors.

INDUSTRIES

- Mining.
- Utilities (Sewer/Water)
- Oil & Gas
(Offshore / Onshore)
- Petrochemical
- Power Generation
(Hydroelectric & Nuclear)

KEY APPLICATIONS

- Small Diameter Pipelines
- Unpiggable pipelines
- Subsea vessel inspections
- Fresh water line
- Sewer systems
- FOSAR
- Calverts
- Tanks

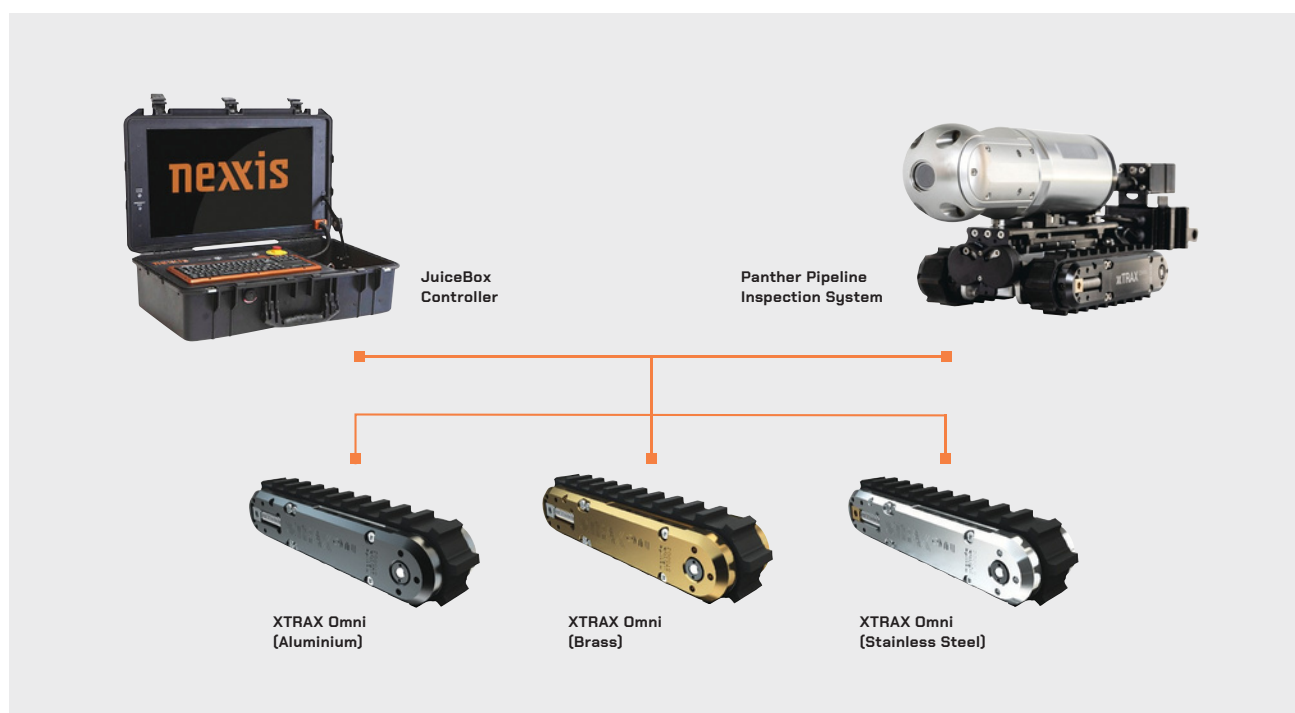

Reach the Unreachable



PIPE CRAWLER SPECIFICATIONS

INTERNAL PIPE SIZE	Minimum	205 mm (8"0)
	Maximum	Flat (180°)
TETHER LENGTH	100m (328 ft) standard	
CAMERAS	Front & Rear, multiple range of HD options	
WEIGHT	From 6.8kg / 15 lbs (depending on material and accessories)	
PULLING CAPACITY	9kg / 19.8 lbs	
PAYLOAD	16 kg / 35.7 lbs	
TEMPERATURE RATING	Standard	0-50 °C / 32-122 F
DEPTH RATING	Standard	Up to 150 m / 492 ft
MATERIAL OPTIONS	Aluminium, Stainless Steel, Other custom options	
CONTROL SYSTEM	Power Supply	110-240 V AC, 500 W
	Controller	JuiceBox

CAMERA SPECIFICATIONS

Aluminium anodised, high-resolution camera for detailed imaging with integrated LED lighting and pan & tilt function.

ZOOM LENS	10x Optical / 12x Digital
DEPTH RATING	60 m -150 m / 196.85 - 492.12 ft
LIGHTS	4x High Intensity LED Floods built into camera
TEMPERATURE RATING	0 - 50 °C / 32 - 122 F
WEIGHT	3 kg / 6.6 lbs

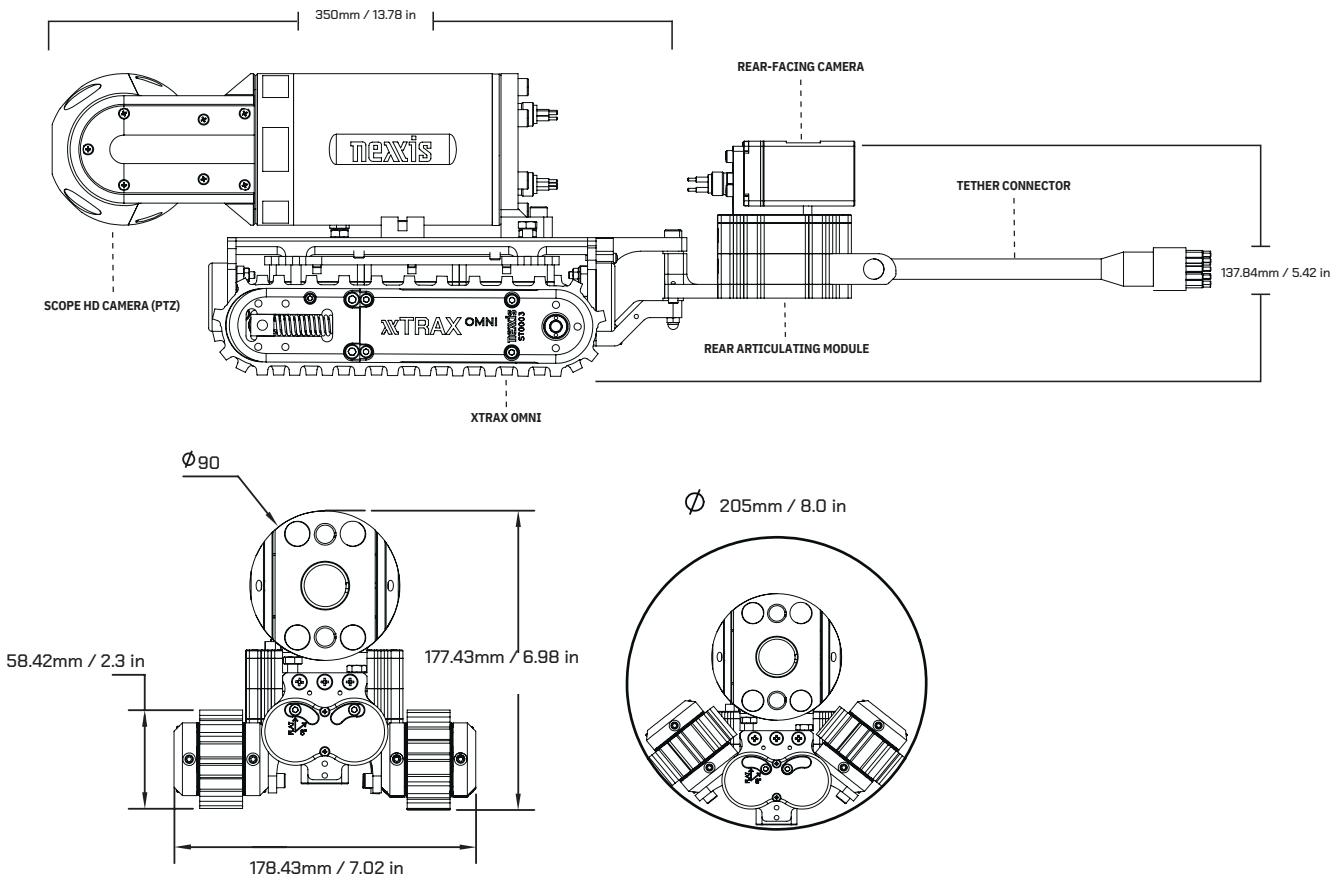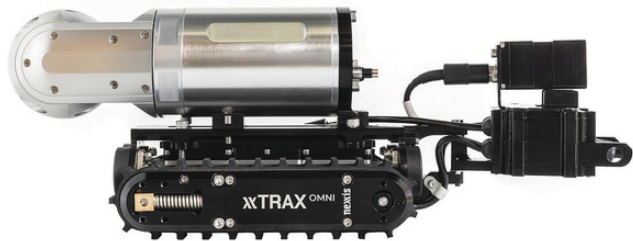

HOUSTON

315 Odyssey, Suite D
Webster, TX 77598
United States
Ph: +1 (713) 258-6061

AUSTRALIA

35 Peel Road
O'Connor, WA 6163
Australia
Ph: +61 (08) 9418 4952

SINGAPORE

37 Jalan Pemimpin
#03-02 MPAEX
Singapore 577177
Ph: +65 3158 0269

GET IN CONTACT